


Prima

# APBX 10 S4S

Sealed sub box  
800 W



TECHNICAL SPECIFICATIONS		
Component		Passive Subwoofer Sealed box
Size	mm (in.)	250 (10)
Power Handling	W peak	800
	W continuous	400
Impedance	Ω	4
Magnet size D x d x h	mm (in.)	470 x 142 x 334 (18.5 x 5.59 x 13.15)
Weight of one component	kg (lb.)	8,63 (19.03)
Voice Coil Ø	mm (in.)	60 (2.36)

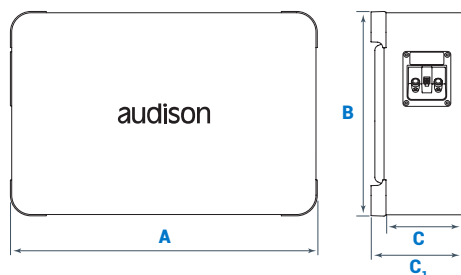

A	B	C	C <sub>1</sub>	
470	334	120	142	mm
18.5	13.15	4.72	5.59	in.

1. Ultra-low profile (5.6 in. / 142 mm) box with sealed design perfectly tuned to fully exploit the APS 10 D driver.
2. 2S<sup>2</sup> (2 Sides/2 Sounds) design provides the ability to choose between Down-Firing mounting to increase the low-frequency extension and Up-Firing install to obtain more punch and definition.
3. Leveling feet with Velcro inserts included for a secure grip with the carpet while maintaining easy removal.
4. SSP (Sub Smart Plug) features both traditional push contacts and a Plug-&-Play terminal block to easily configure the impedance as required and provides a quick release.
5. Rounded corners allow easy positioning in the trunk and act as reinforcement to reduce enclosure resonance.
6. Special designed cone-dustcap-basket geometry which guarantees a long linear excursion capability (11 mm, one-way).
7. Massive driver motor assembly, optimized with FEM (Finite Element Modeling) for perfect control under high excursion conditions.
8. Water-repellent treated paper 10 in. cone, featuring a profile developed with FEM simulation and optimized with the Klippel Scan Vibrometer.
9. Specifically developed to be combined with AP F8.9 bit (2 CH bridged - 260 W RMS) amplifiers taking advantage of the bass boost feature and integrated parametric equalizer of the built-in DSP.
10. Sturdy metal grid included for a total protection of the subwoofer driver.



**Elettromedia**  
62018 Potenza Picena (MC) Italy  
T +39 0733 870 870 - F +39 0733 870 880  
elettromedia.com

