


2 Vie per PT252 • CT382 • PT383

500 W | 8Ω

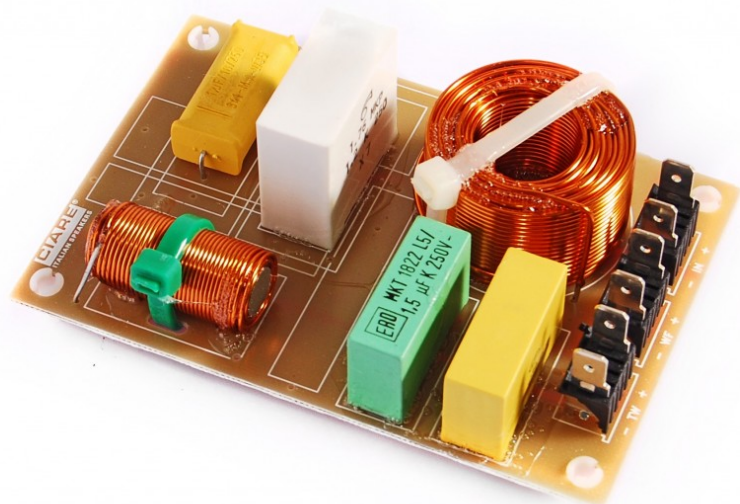

General specification

Maximum Power Handling	500 W
Nominal Power Handling	300 W
Number of ways	2
Nominal Impedance	8•8 Ω
Slope	-
Crossover frequency	5000 Hz

Mechanical data

Dimensions	80 x 120 x h35 mm
N. of mounting hole	4
Mounting hole diameter	4 mm
Position of mounting holes	68 x 108 mm
Net weight	0,600 Kg
Sales unit	2

Diagram

PROFESSIONAL PF209

Drivers allocation	-
Connectors Type	Faston
Accessoires	-

Single Shipping Box	135 x 170 x h45 mm
Master carton quantity	6 Pz

CIARE[®]

